

KCP45ZX170



■ Boom specifications

Vertical reach	44.3 M	(145' 5")
Horizontal reach	40.5 M	(132' 11")
Reach from front of truck	37.6 M	(123' 6")
Unfolding height	8.6 M	(28' 3")
Section articulation	92° /180° /225° /180° /245°	
Rotation	370°	
Delivery line	125 mm	(5")
Proportional boom	Yes	
End hose length	4 M	(13')
Outrigger spread-front	8.87 M	(29' 1")
Outrigger spread-rear	9.9 M	(32' 6")
Max outrigger weight	28,000 kg	(61810 lbs)

■ Pump specifications


Maximum output	170 m³/h	(222 yd³/h)
Concrete cylinder	Ø230×2100 mm (9"×83")	
Stroke per minute	32	
Concrete pressure(rod)	72 bar	(1044 psi)
Hopper capacity	0.6 m³	(21 ft³)
S-tube	Ø200×Ø180 (8"×7")	
Hydraulic pump	Kawasaki K3V140DT (Rexroth A11VO260)	
Cycling system	Hydraulic with manual overrides	
Max aggregate size	60 mm	(2 1/2")

※ maximum theoretical values listed.



■ Truck mounted specifications

Available SCANIA, VOLVO, MERCEDES BENZ, MAN, IVECO, DAF, MAZ, ASTRA, MR MACK, FREIGHTLINER, HYUNDAI, DAEWOO, ...

■ Working diagram

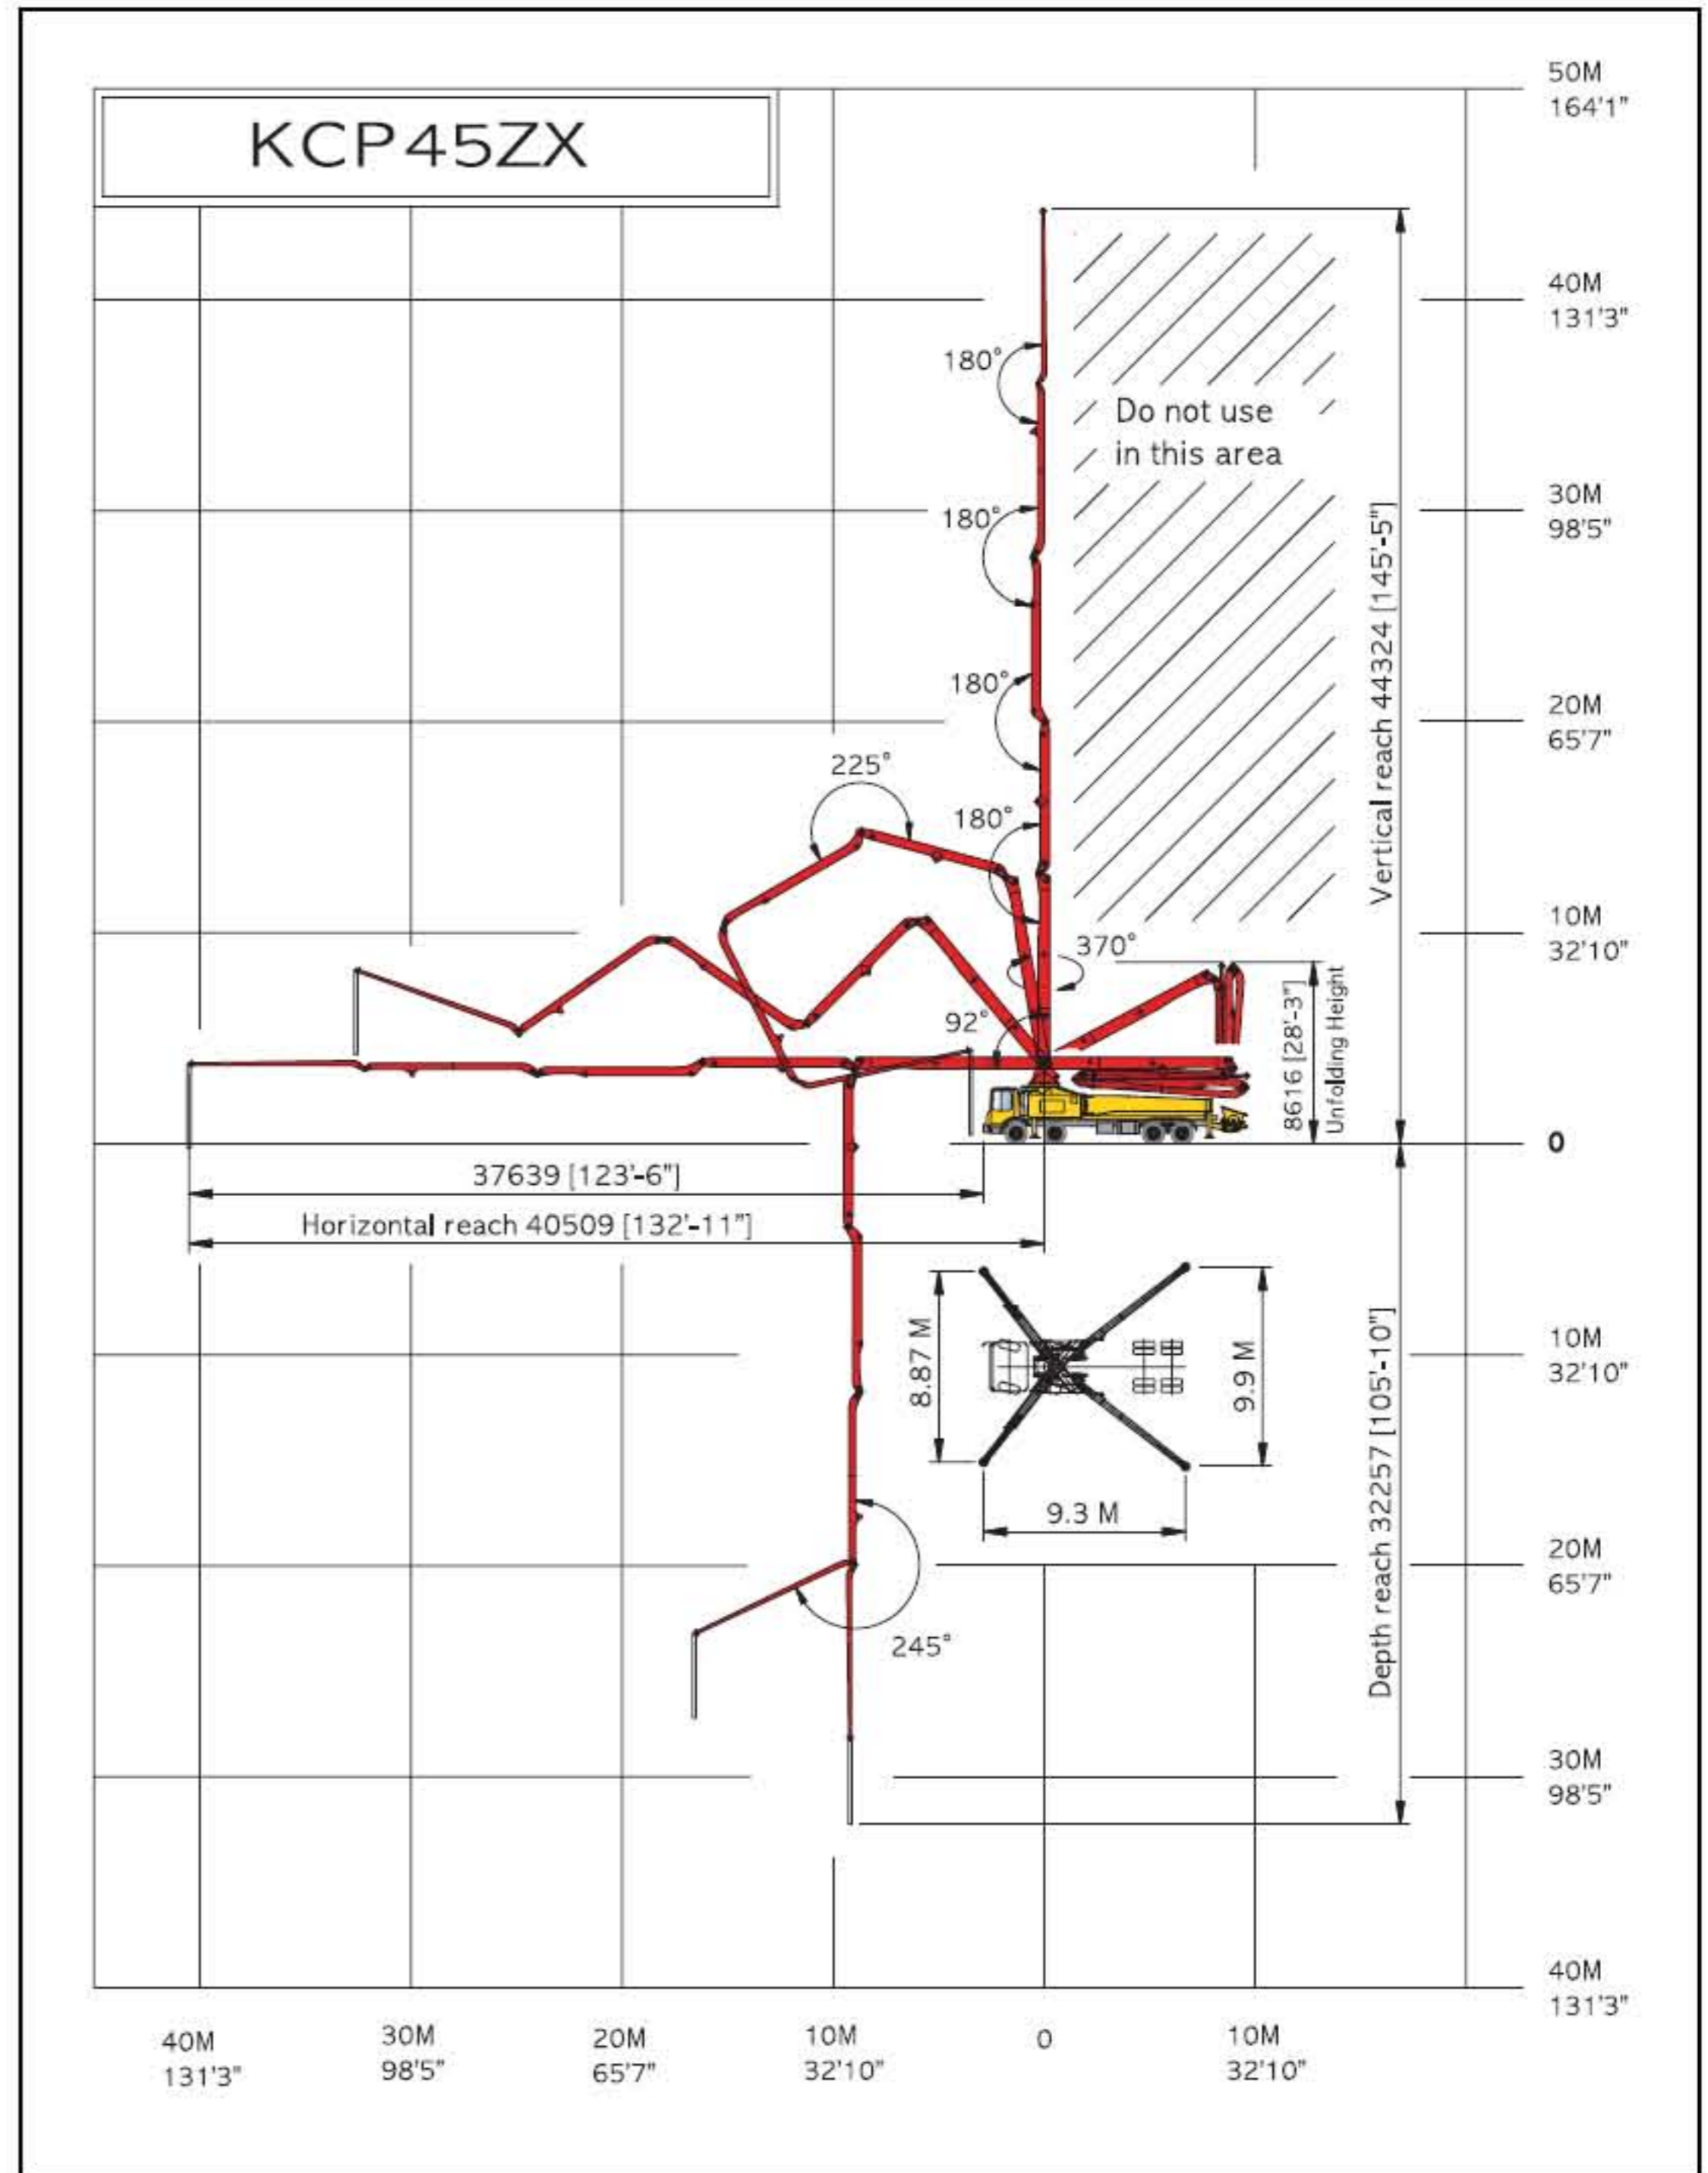

■ Weight diagram

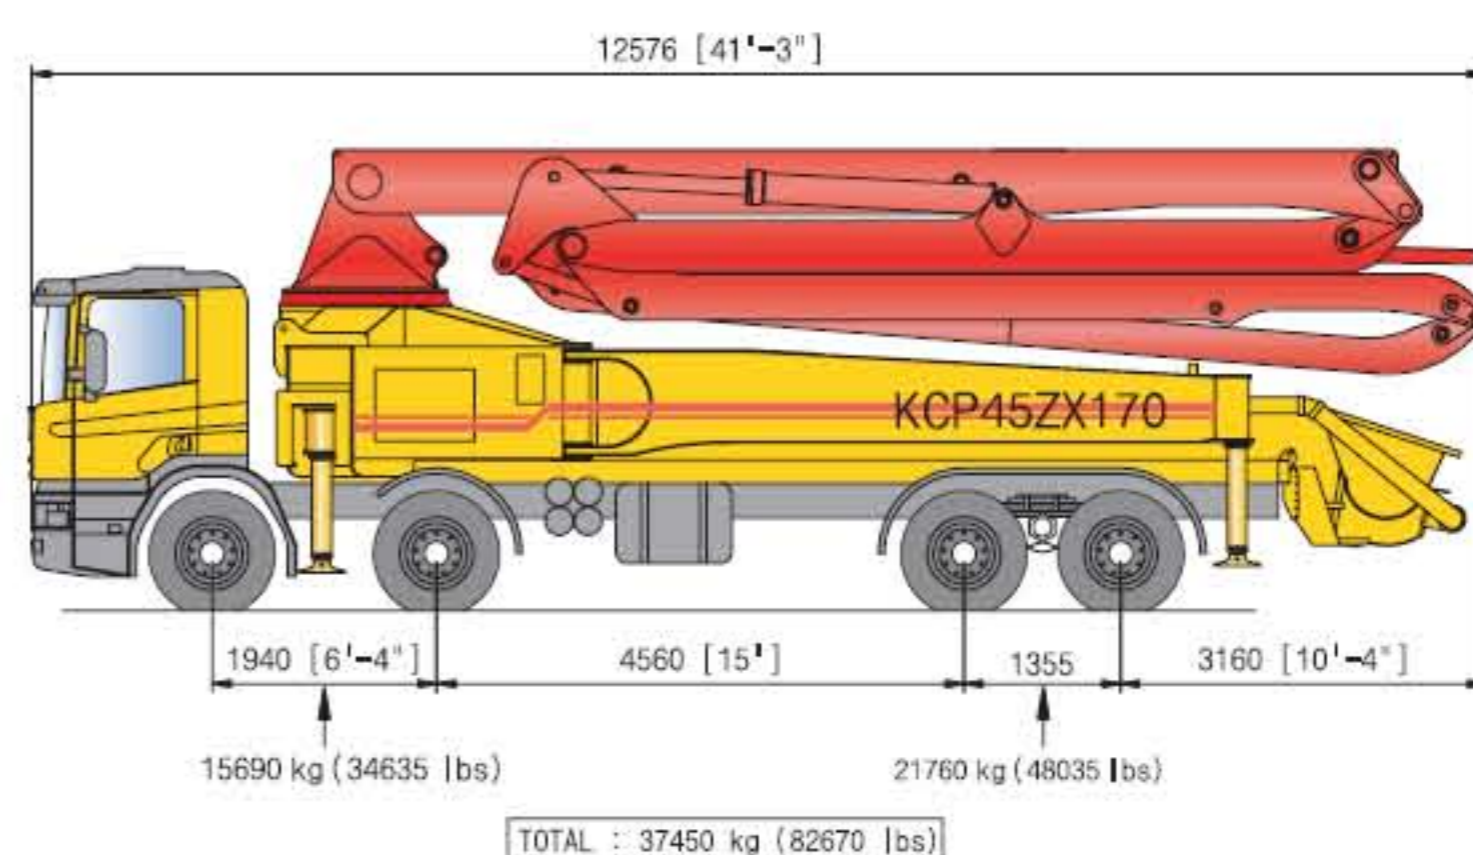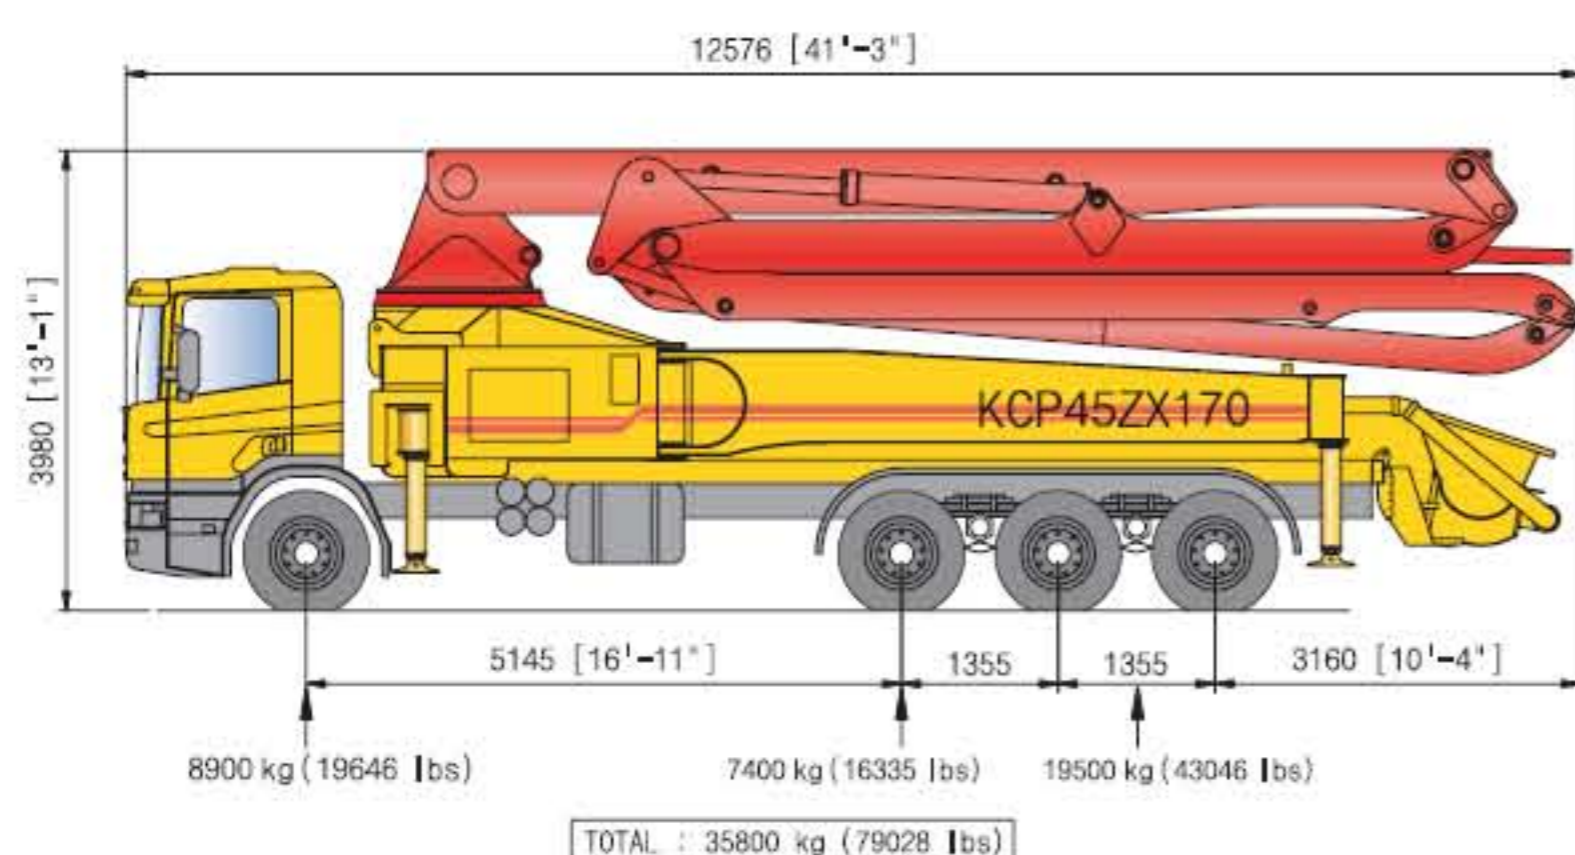

※ photos and drawings are for illustrative purpose only.
 ※ dimension will vary with different truck makes, models and specifications.

※ right to make technical amendments reserved.