KCP50ZX170



■50ZX200 – Optional

Maximum output	200 m³/h	(261 yd³/h)
Concrete cylinder	Ø280×2100mm	(11"×83")
Stroke per minute	25.6	
Concrete pressure(rod)	87.5 bar	(1270 psi)
S-tube	Ø220×Ø180	(9"×7")
Hydraulic pump	Kawasaki K3V180DT	
	(Rexroth A20VLO190)	

■Boom specifications

Vertical reach	49.4 M	(162' 2")
Horizontal reach	45.6 M	(149' 8")
Reach from front of truck	42.6 M	(139' 8")
Unfolding height	10.6 M	(34' 8")
Section articulation	92°/180°/225°/180°/210°	
Rotation	370°	
Delivery line	125 mm	(5")
Proportional boom	Yes	
End hose length	4 M	(13')
Outrigger spread-front	9 .1M	(29' 10")
Outrigger spread-rear	9.95 M	(32' 8")
Maxoutrigger weight	33,500 kg	(73950 lbs)

■Pump specifications


Maximum output	170 m³/h	(222 yd³/h)
Concrete cylinder	Ø230×2100mm	(9"×83")
Stroke per minute	32	
Concrete pressure(rod)	72 bar	(1044 psi)
Hopper capacity	0.6 m³	(21 ft³)
S-tube	Ø200×Ø180	(8"×7")
Hydraulic pump	Kawasaki K3V140DT	
	(Rexroth A11VO260)	
Cycling system	Hydraulic with manual overrides	
Max. aggregate size	60 mm	(2 1/2")

※maximum theoretical values listed.


■Truck mounted specifications


Available SCANIA, VOLVO, MERCEDES BENZ, MAN, IVECO, DAF, MAZ, ASTRA, MR MACK, FREIGHTLINER, HYUNDAI, DAEWOO,···

■Working diagram

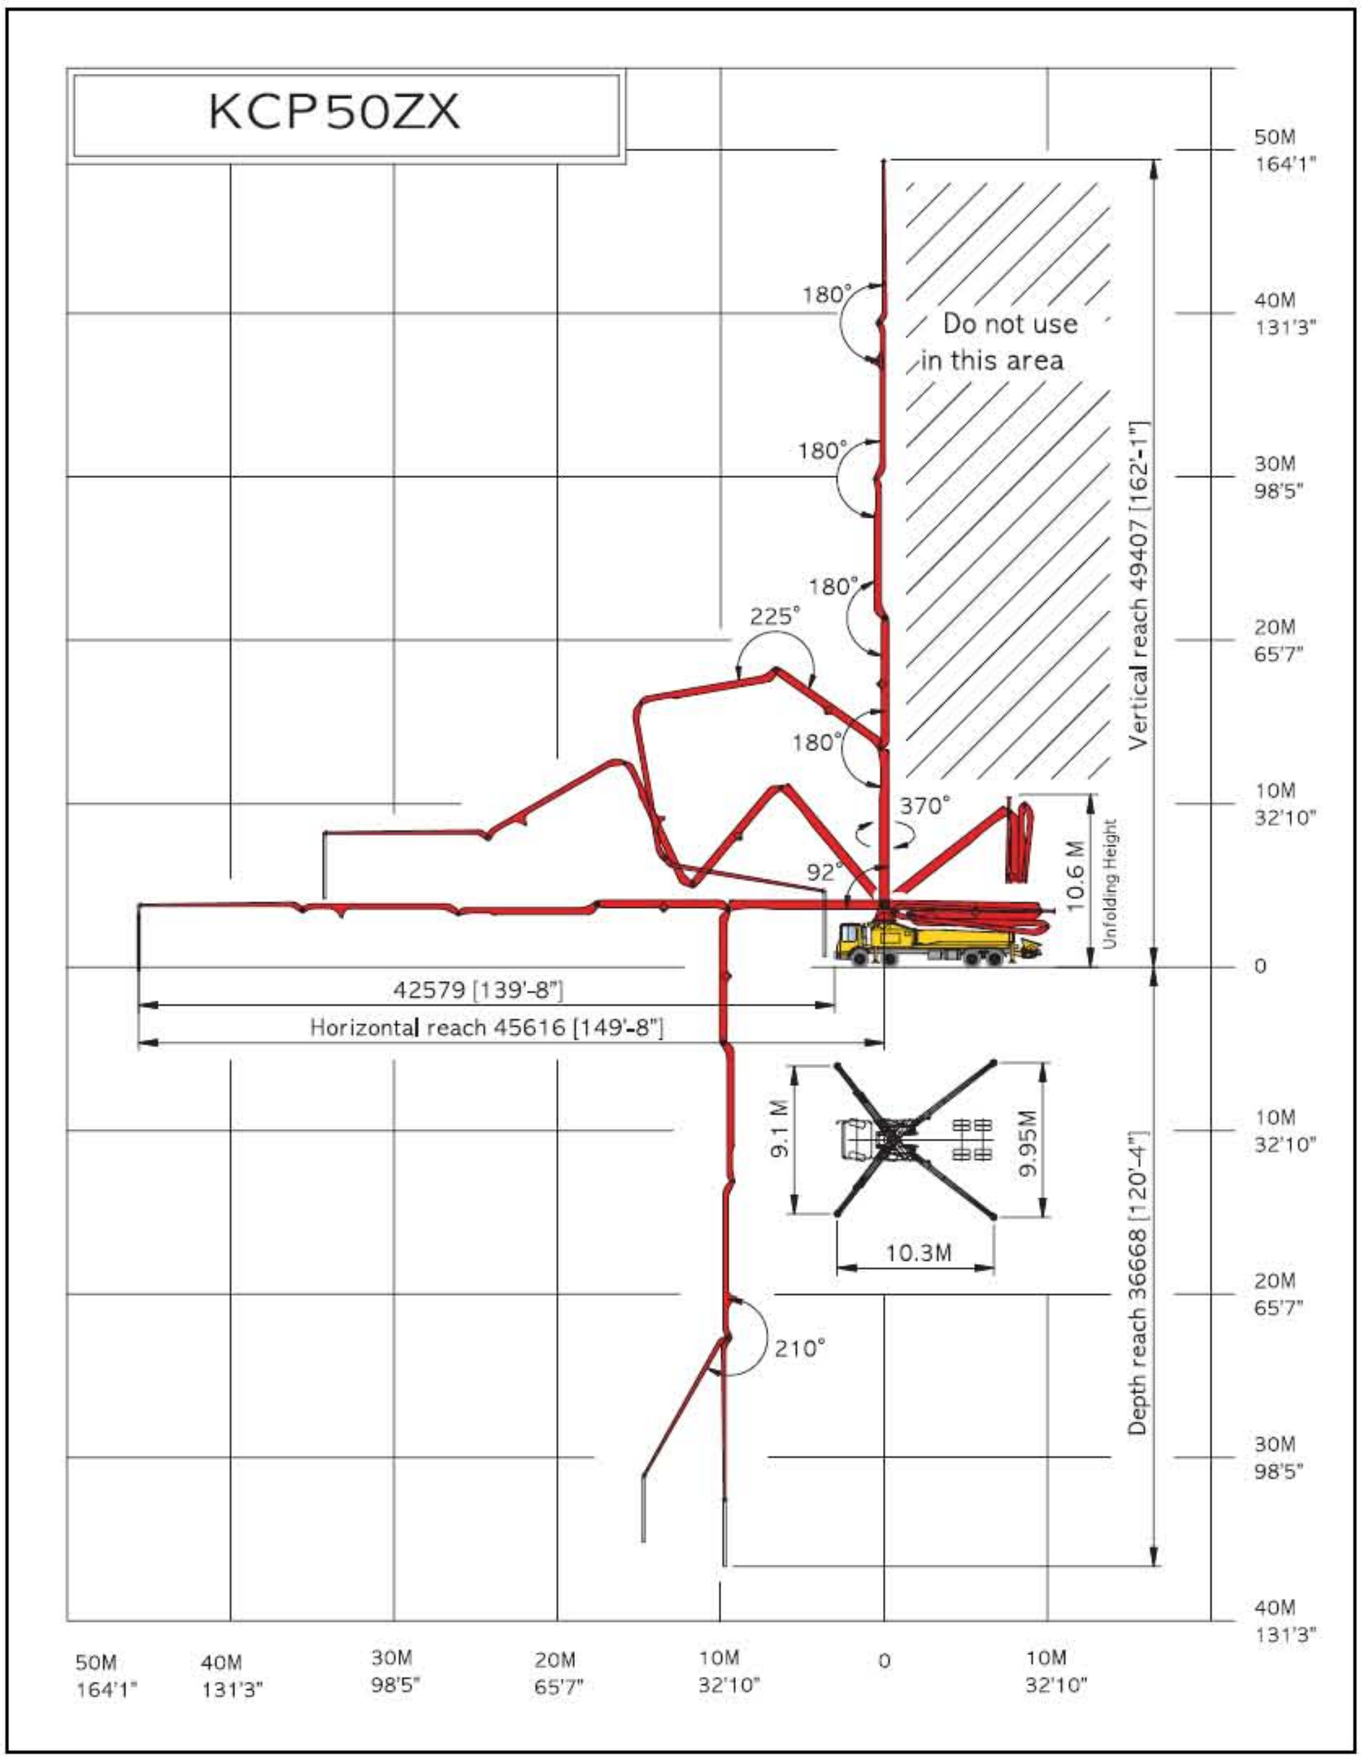

■Weight diagram

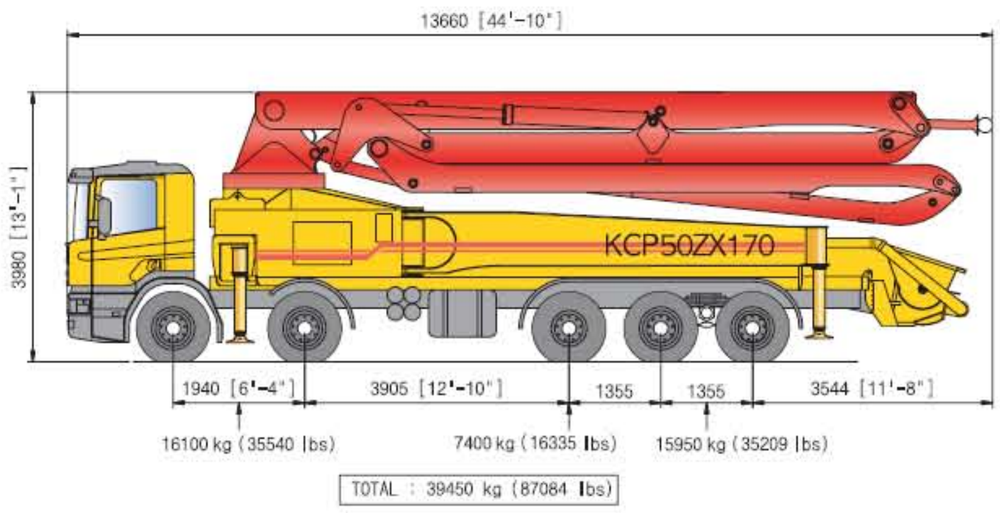

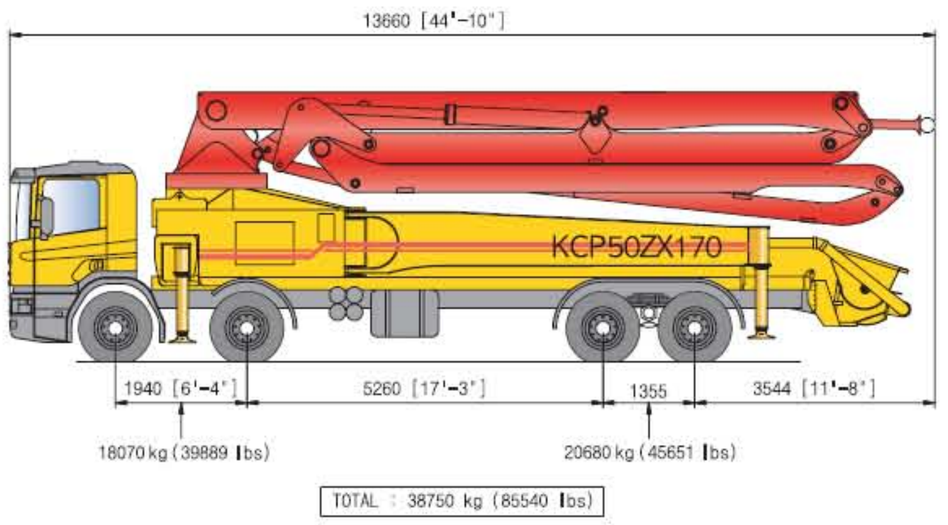

※photos and drawings are for illustrative purpose only.
※dimension will vary with different truck makes,models and specifications.

※right to make technical amendments reserved.