




KCPPUMP s.r.o. – Vysokov 140 - 549 12 Náchod - Vysokov – **CZECH REPUBLIC**
 T/F: +420 491482423, +420 777764605, e-mail: obchod@kcppump.cz - www.kcppump.cz


WEAR RESISTANT **ECO750 SINGLE WALL DECK AND BOOM PIPE**
WITH 3,5mm THICKNESS PRODUCT IS UNDER PATENT PROTECTION

NEW PRODUCT LINE OF **KCP**, DEVELOPED AND MANUFACTURED BY **TMC** COMPANY. PRODUCTS MEET PARAMETERS IN ABRASIVE WEAR, ELASTICITY AND DUCTILITY. DURABILITY **35.000m³**.


ECO Pipe Features

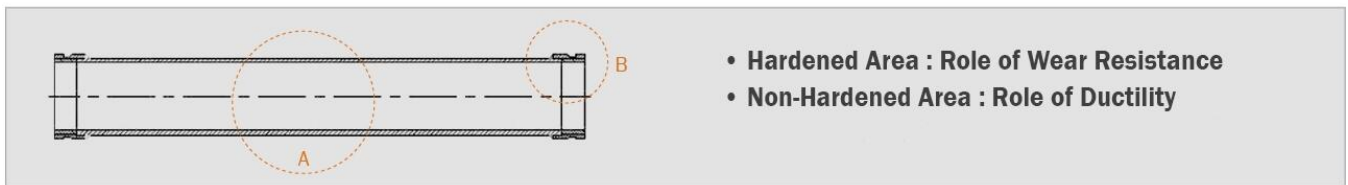

“ A ” Detail : Spiral Characteristy (Imagine “Spring”)

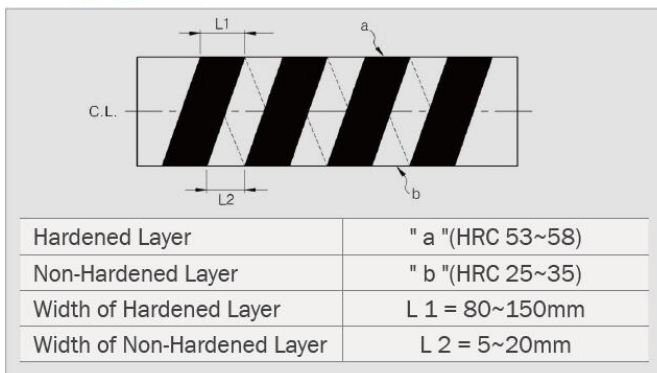

“ B ” Detail

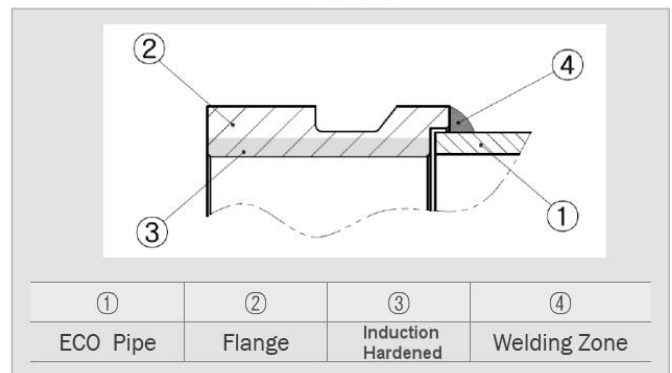

PIPE TECHNICAL SPECIFICATION

| PIPE 5“ (COMBINATION) | ECO750 – (COMBINATION) DECK AND BOOM |
|------------------------------|---|
| WALL THICKNESS: | 3.5mm |
| HARDENED LAYER: | HRC 53-58 (HV 560-660) |
| NON-HARDENED LAYER: | HRC 35 (HV 350) |
| WEIGHTS: | |
| L - 3000mm | 36.4kg |
| L - 2500mm | 30.3kg |
| L - 2000mm | 24.3kg |
| L - 1000mm | 12.1kg |
| L - 500mm | 6.1kg |
| MINIMAL DURABILITY | ≥ 35.000m³ |

SINGLE WALL **“ECO750“** PIPE – ITS USAGE IS RECOMMENDED FOR ALL PUMPING RANGE OF PUMPABLE CONCRETE MIXTURES IN STANDARD AND HARD CONDITIONS